

High Efficiency Liquid-Solid Separators

Continuous Filtration with Zero Maintenance



FLOW RATES:

40 to 450 US gpm (9 – 102 m³/hr)

For higher flow rates, two or more separators can be manifolded (see page 4)

Maximum Pressure Rating: 150 psi (10.3 bar)

Maximum Operating Temperature: 180° F (82° C)

A high efficiency liquid-solid separator that provides the finest filtration using centrifugal action for cooling tower systems; resulting in reduction of maintenance and water consumption.

The eHTX Separator is the latest in technology from LAKOS, the leader in liquid-solid filtration for HVAC applications.

Innovative. Reliable. Effective. Energy Efficient.

eHTX Features and Benefits:

- Filter performance rated to remove 98% of all solids 44 micron (325 mesh), 2.6 specific gravity, and larger in a single pass and 99% down to 25 micron (550 mesh) in recirculated systems
- No moving parts to wear out; no barriers or media to change
- Space saving vertical profiles
- Low and steady pressure loss; as low as 2 psid
- Options for zero water loss
- Continuous filtration and no backwashing; periodic automated purging eliminates routine maintenance and messy service routines
- Optional materials of construction and ASME code available
- Improve downstream thermal efficiency of heat transfer surfaces
- eHTX Separators include pressure gauges

FILTRATION APPLICATIONS:




Full Stream



Side Stream



Closed Loop


WATER USAGE	SOLIDS METER	MAINTENANCE
 Zero Water Loss Options Available	 Micron Removal µm (microns)	 Zero Maintenance



LAKOS High Efficiency Product™

LAKOS
Separators and Filtration Solutions

Full Stream

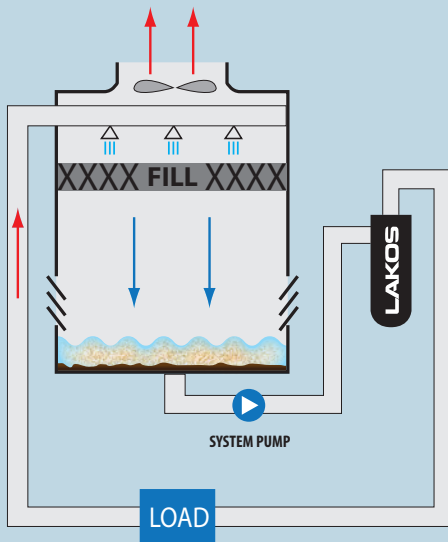


Benefits:


- Filter 100% of flow from the cooling tower to downstream equipment – with zero downtime
- Maintain design heat transfer efficiencies on new and existing equipment
- Significantly extend maintenance intervals for cleaning chiller tubes, plate heat exchangers, compressors, etc.
- Zero filtration maintenance when using LAKOS Controllers and Automated Purge Valves
- Point of use application

Flow vs. Pressure Loss Chart

- A** eHTX-0040
- B** eHTX-0060
- C** eHTX-0080
- D** eHTX-0090
- E** eHTX-0140
- F** eHTX-0185

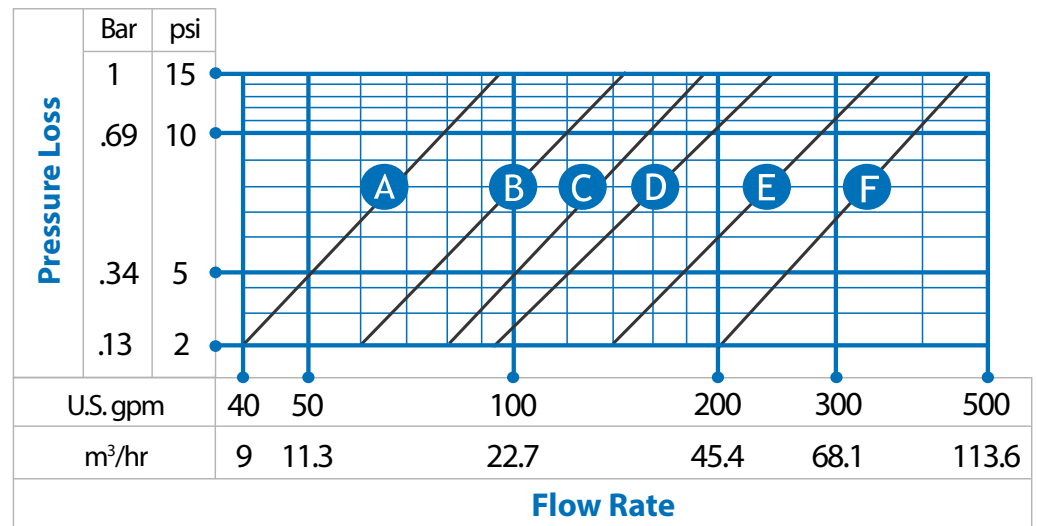


Solids Removal Chart: Recirculated flow at 20% Side Stream

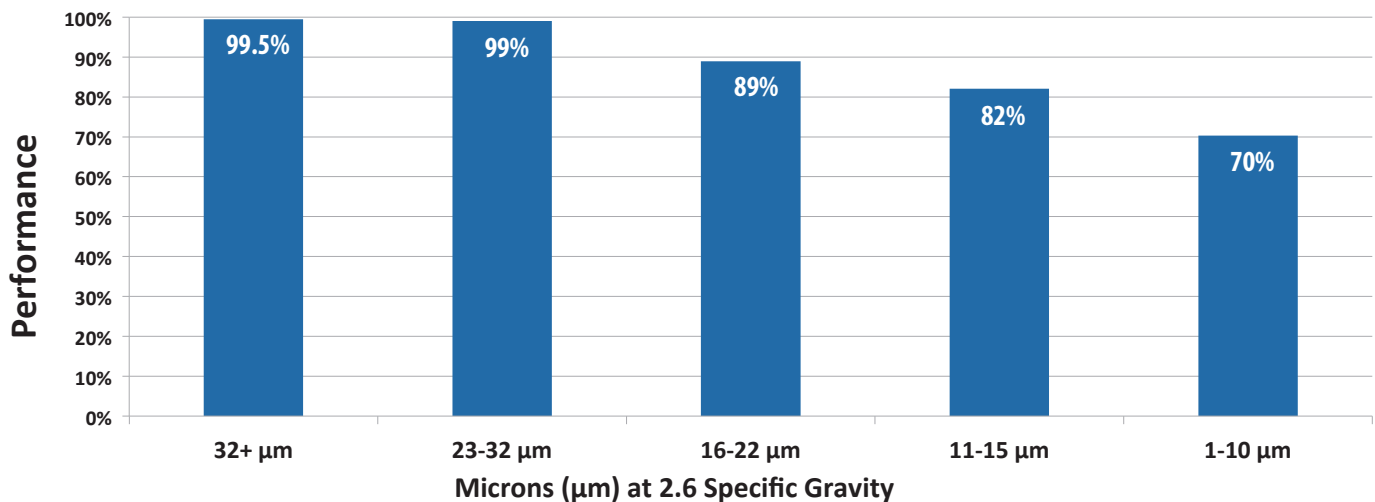


The above efficiency results were based upon 20% side stream within 16 hours. Field results may vary depending on side stream percentage and basin size. Performance results verified by independent testing.

How It Works

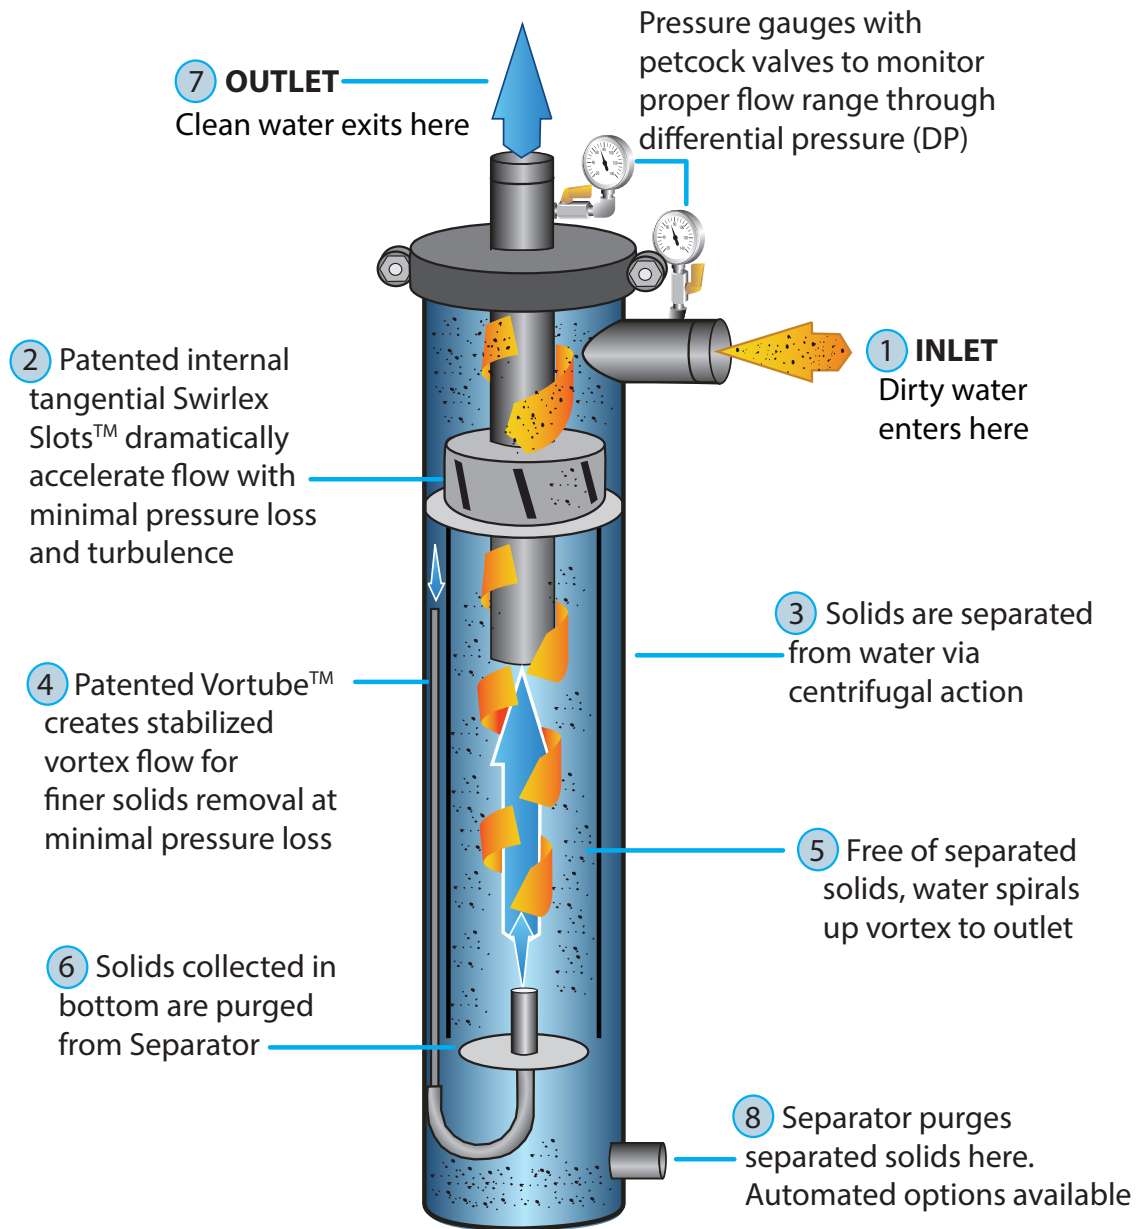


PATENTED SWIRLEX SLOT



2

Patented Swirlex slots dramatically accelerate flow to efficiently magnify separation without increased turbulence and efficiently remove troublesome solids without abrasive wear.


INTERNAL BARREL



3

Proprietary lower vortex stabilization methodology further enhances solids separation.


PATENTED VORTUBE



4

Patented Vortube geometry capitalizes on strong pressure gradient present at the center of the vortex to effectively pull finer solids into the collection chamber.

Higher Flow Rates

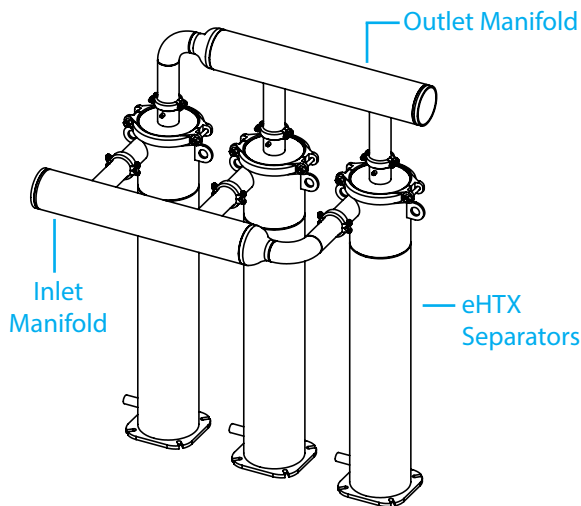

Manifolding in Parallel for High Flow Rates

When water system flow rates exceed that of any single LAKOS Separator, manifolding two or more units together can help achieve large flow requirements. LAKOS can assist with separator manifold design and build for high flow rate applications. Manifolding multiple units keeps units smaller, easier to install and provides for future flow rate changes.


Example: Three eHTX-0185 Separators increase flow range to 555 – 1350 US gpm (126 – 307 m³/hr)

Separated Solids Disposal

Solids Recovery Vessel (SRV)

Features and Benefits:


- Solids Recovery Vessel (SRV-833) features double capacity to allow for fewer bag change outs; includes two ten micron bags on order
- Lower waste treatment costs, meet waste disposal requirements and greatly reduce chemical loss
- eHTX Separators can purge to either SRV-816 or SRV-833 for separated solids collection
- Optional indicator package to facilitate bag change-outs
- For more information see LAKOS literature LS-622

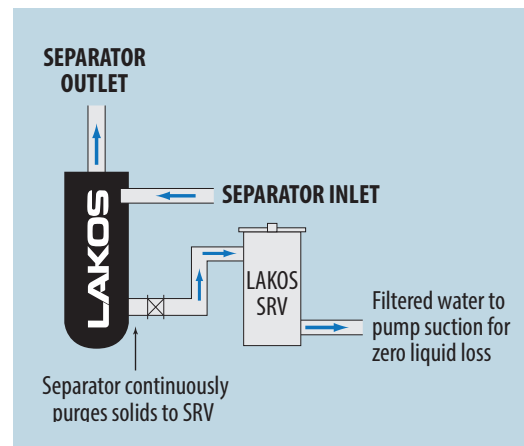

Electric Fail-Safe Valve (EFS)


Features and Benefits:

- Battery backup electric fail-safe option automatically closes valve in event of power failure
- Eliminates manual purging
- EFS actuator features an electronic circuit that automatically adjusts the motor speed (depending on torque variations) to keep cycle time constant – maintaining consistent purge durations
- Ability to set both purge duration and interval
- For more information see LAKOS literature LS-913

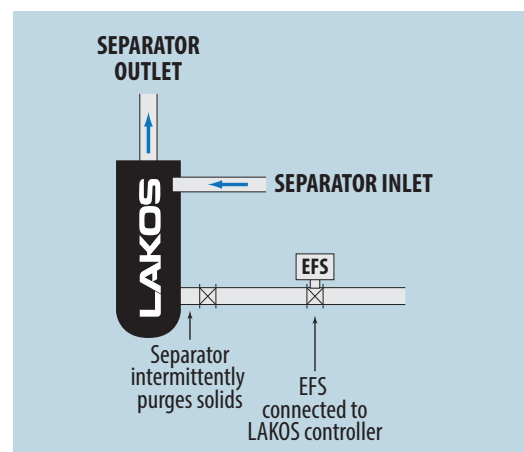


Models & Dimensions

eHTX Separator

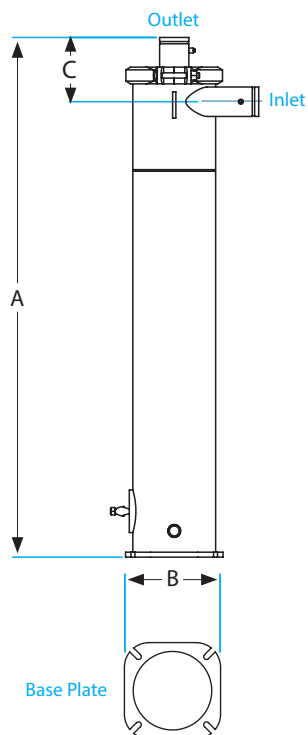

Recommended direction of inlet/outlet piping to control vibration

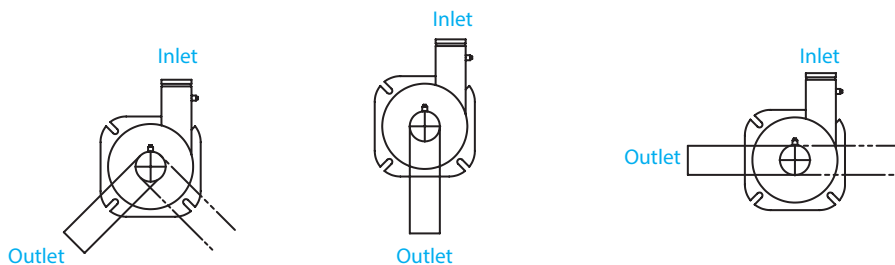

MODELS AND DIMENSIONS:

Model	A		B		C	
	in	mm	in	mm	in	mm
eHTX-0040-V	42	1070	13	330	7	178
eHTX-0060-V	48	1208	13	330	7.25	184
eHTX-0080-V	56	1432	13	330	8.43	214
eHTX-0090-V	64	1616	13	330	9	229
eHTX-0140-V	73	1861	15	381	9.81	249
eHTX-0185-V	79	2016	15	381	9.81	249

NOTE: Hand-hole included on eHTX-0140 and eHTX-0185 models only

SPECIFICATIONS:

Model	Flow Range US gpm		Flow Range m ³ /hr		Inlet/ Outlet	Purge Size Male NPT	Solids Collection Capacity		Empty Weight		Weight w/Water	
	low	high	low	high			gal	liters	lbs	kg	lbs	kg
eHTX-0040-V	40	95	9	21	1-1/2"	3/4"	0.6	2.3	184	83	257	117
eHTX-0060-V	60	140	13	31	2"	3/4"	0.6	2.3	221	100	305	138
eHTX-0080-V	80	185	18	42	2-1/2"	3/4"	1.2	4.5	298	135	456	207
eHTX-0090-V	90	230	20	52	3"	3/4"	1.2	4.5	328	149	508	230
eHTX-0140-V	140	325	32	74	4"	1-1/2"	1.7	6.4	486	220	772	350
eHTX-0185-V	185	450	42	102	4"	1-1/2"	1.7	6.4	498	226	807	366

SEPARATED SOLIDS DISPOSAL:

Solids Recovery Models	Solids Collection Capacity	Liquid Retention Capacity
SRV-816	360 cubic inches (6 liters)	5 gallons (19 liters)
SRV-833	732 cubic inches (12 liters)	8 gallons (30.5 liters)

Purge Valve Models	Purge Valve Size
EFS-07	3/4 inches (19.05 mm)
EFS-15	1 1/2 inches (38.1 mm)
ABV-07	3/4 inches (19.05 mm)
ABV-15	1 1/2 inches (38.1 mm)

For more information about ABV valves see LAKOS literature LS-238

Independent Testing

Filtration Test completed on LAKOS 3" Separator Design Iteration 200/8/12.

The filter assembly was installed with test components defined as follows installed in the following order starting upstream:

- 1) 3" turbine-type flow meter
- 2) 20 micron disc filter assembly
- 3) 4" pipe spool with sand-injection pump
- 4) 3" spool
- 5) Separator under test
- 6) 3" pipe spool
- 7) 20 micron disc filter assembly

Test Conditions: 200 gpm, 11.4 psi loss

Sample Breakdown (Grams):

45-75 micron: 75.000


Total sample size: 75.000

Recovered grams from downstream filters: 1.001

Filter efficiency: $73.999 / 75.000 = 98.7\%$

Note: Sand sample: Quartz, Silicon Dioxide by Powder Technology Inc.

Date: August 1, 2012

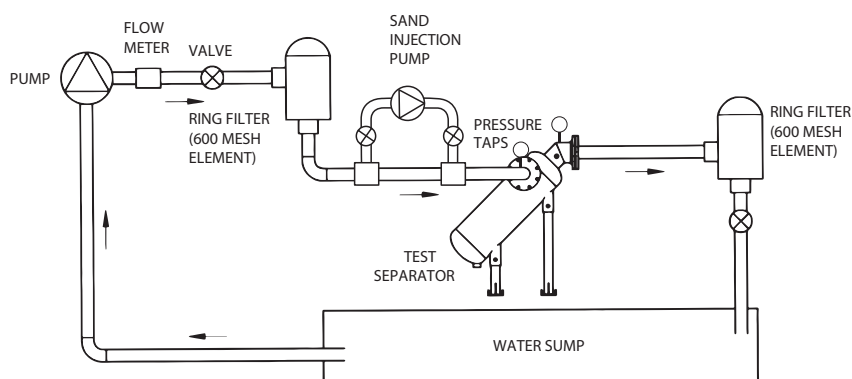

LAKOS Separators have been independently tested and certified by an independent testing agency, the International Center for Water Technology (ICWT), confirming our separators' filtration performance and capability to remove troublesome particle matter from pumped water.

For over 30 years the internationally recognized ICWT/CIT Testing Laboratories have been providing independent, third party testing to a wide range of irrigation and other industries around the world.

ICWT has experience with hydraulics, pumps, filters, and valves. Fluid component testing provides manufacturers, distributors and end-users with accurate performance data for applicability assessment and enable product development. ICWT was recently certified by IAPMO R&T - North America's premier third party certification body for plumbing and mechanical products. More information about the testing agency and testing process can be found at www.californiawater.org. This test agency is available and approachable to confirm its test methodologies and results.

International Center for Water Technology-
California State University Fresno
5370 North Chestnut Ave., Fresno, CA 93740-0018,
Phone: 559-278-2066, www.californiawater.org



**Cleaning
chilled water,
Axima Belgium**



**Cleaning
city water,
Florida USA**



**Protecting Heat
exchangers,
Nevada USA**

Claude Laval Corporation, headquartered in Fresno California since 1972, is recognized worldwide for engineering, manufacturing and marketing the original centrifugal action solids from liquids separator and being the world-wide leader in cyclonic separation technology.

LAKOS Separators are manufactured in the USA. 

All LAKOS eHTX Separators are warranted for five (5) years from date of delivery.
For detailed warranty information visit <http://www.lakos.com>

LAKOS is an active member of the U.S. Green Building Council
LAKOS is a proud and contributing member of ASHRAE for over 30 years

LAKOS Separators are manufactured and sold under one or more of the following U.S. Patents:
5,320,747; 5,338,341; 5,368,735; 5,425,876;
5,578,203; 5,622,545; 5,653,874; 5,894,995;
6,090,276; 6,143,175; 6,167,960; 6,202,543;
7,000,782; 7,032,760 and corresponding foreign patents, other U.S. and foreign patents pending.

LAKOS®, Swirlex Slots™ and Vortube™ are trademarks of Claude Laval Corporation

LS-924 (Rev. 3/13)

LAKOS
Separators and Filtration Solutions

1365 North Clovis Avenue
Fresno, CA 93727

www.lakos.com

Tel: (559) 255-1601
Fax: (559) 255-8093

info@lakos.com